

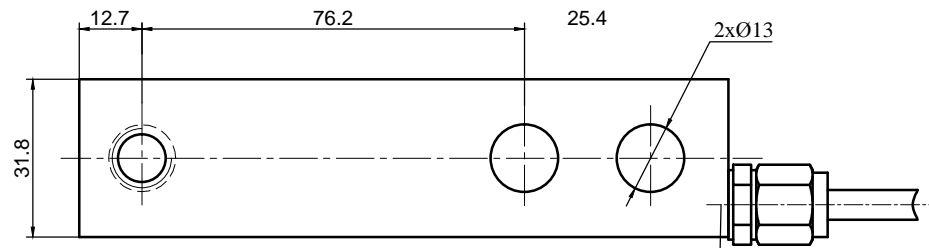


灵敏度	3.0
Sensitivity	3.0
非线性	0.002
Non-linear	0.002
迟滞	0.002
Hysteresis	0.002
(0 分钟) 蠕变	0.002
Creep (0 min)	0.002
温度影响 TCZ	0.002
TCZ influence	0.002
湿度影响 TCZ	0.002
TCZ influence	0.002
输入电阻	>10 ¹¹ Ω
Input resistance	>10 ¹¹ Ω
输出电阻	<10 Ω
Output resistance	<10 Ω
绝缘	>10 ¹¹ MΩ
Insulation	>10 ¹¹ MΩ
额定	0.1
Nominal	0.1
范围	0.1
Service	0.1
安全负载	0.1
Safe load	0.1
破坏力	0.1
Breaking force	0.1
电压	0.1
Voltage	0.1
保护	0.1
Protection	0.1
材料	Stainless Steel
Material	Stainless Steel
比例	1:5m:3m 比例 1:1
Scale	1:5m:3m 比例 1:1
直径	Φ6mm
Diameter	Φ6mm

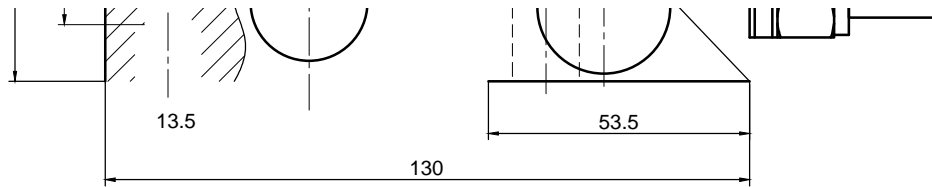

SQB0.1t~2.5t



年月日		图样标记		重量	比例
A					
共张		第张			