
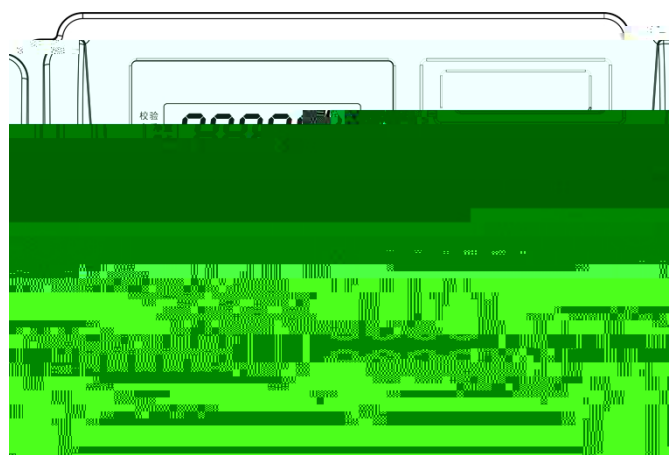


XK3118T12

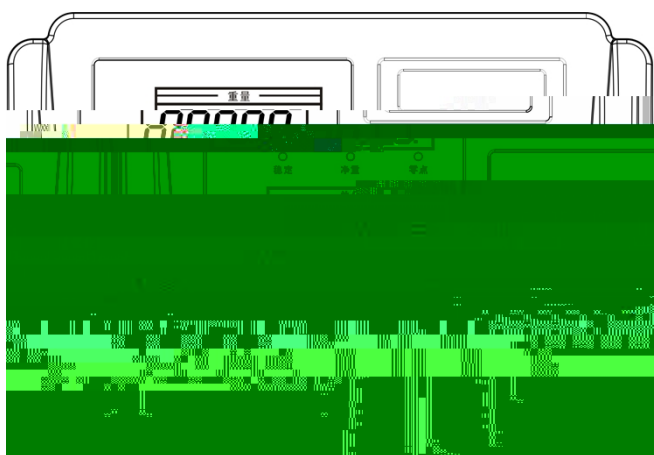

()

2

20

()



400-887-4165
0574-87562271
315033


1)

C LCD S

A/D

°C °C °C
°C °C

2)

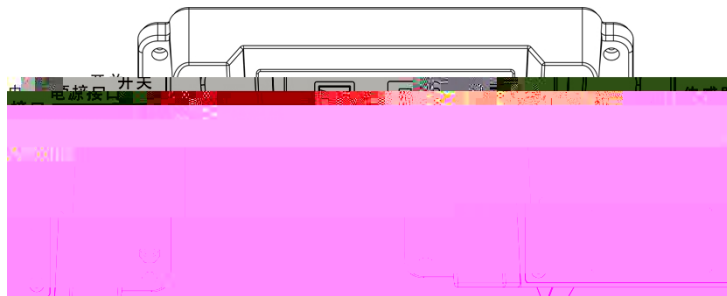

	①
	⑥
	⑧
	⑨
	⑤

[]

[]



--	--	--	--



		br****	(Baud rate) 1200 9600bps
		Co *	(Comunicate Mode) 0 3 (0)

1	33	5kg :12.00, :281.40, ASCII :=W:54.3200=P:00.210 00=T:04.18200 -23.45kg ASCII =54.3200-	23.4
2	33	5kg :12.00, :281.40, ASCII =W:00023.45=P:00012.0 0=T:00281.40 0023.45. -23.45kg ASCII =-	23.4
3		5 ASCII 'A'~'E' 23.45kg 12.00, 281.4 'A': :NW:00023.45 'B': / :UP:00012.00 'C': / :TO:00281.40 'D': : 'D' 'E': : 'E' 03 / 02,	02,

4.1
1 6V

20 2

4.2
1
2 9999.99
3 T12/T12-S 3
4 T12-C/T12-
CS 5

4.3 XK3118T12-S/T12-CS

