



**D30-2**  
**数字显示仪表**  
**使用说明书**







□1□ .

1		DC+12V		19200 bps			
	RS485	1	4	E			30m
2		6	0.8	LED	6		3
3			RS232		600	19200	
4		0	40		85	RH	
5			10	60		95	RH
6			240mm × 155mm × 155mm		×	×	
7			0.9kg				

E

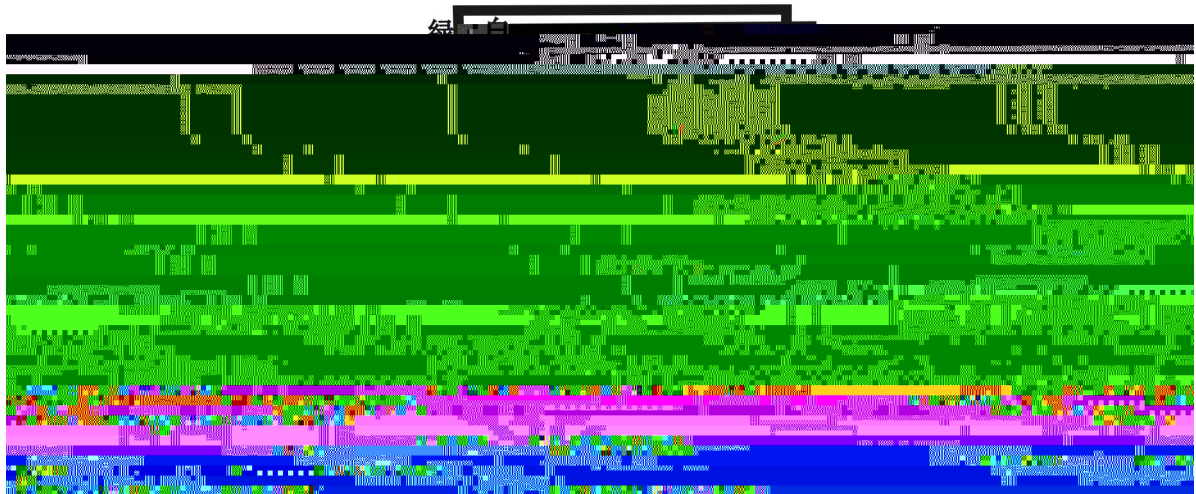

RS232



PC

PC	9
2	2
3	3
5	5

RS232



12V/7Ah

8

/↑

/↓


/←

/→

/

/

1.

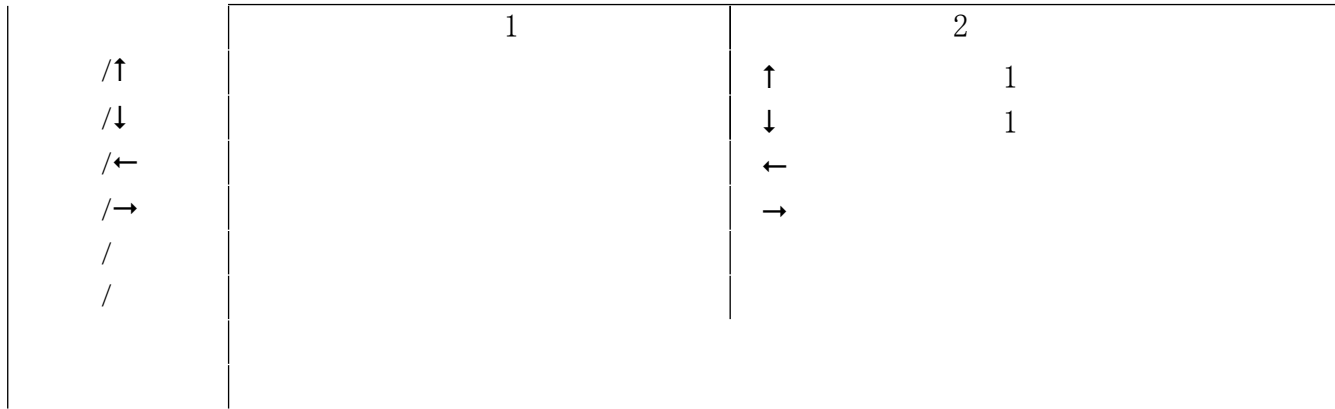



3

/ "0"

" " " "

/ " " " "

4□

a 5 " " "  
 " 2 "n "  
 \*" 3 5

b /→ "CLEARr  
 0" "1" "0"

5

1	/	SEt ** SEt 00	0
2	/	tF * tF 0	0 0~5 0 1~5 A
3	/	bt ***** bt 9600	0 5 0~5 200 600 1200 2400 4800 9600 19 4 9600

1	/	SEt ** SEt 01	1
2	/	un * un lb	;

1	/	SEt ** SEt 02	2
2	/	*****	
3	/	n *	
4		END	



▲!



▲!

Err 01

1 2 3

Err 02

4  
1 5 5 2 3 4

Err 03  
Err 04  
Err 05  
Err 06  
Err 17

1 2 3 0

Ecc 01~04

n

A:

8

3 TF

(1). (TF=1)

A9

( )

999999

12

X		( 20.00 )				
1		(XON)	02	XON	02	
2	+ -		2B/2D	+	2B	
3			30 39	0	30	
4			30 39	0	30	
5			30 39	2	32	
6			30 39	0	30	
7			30 39	0	30	
8			30 39	0	30	
9			0 4	30 34	2	32
10						31
11				0x1B	3b	
12		XOFF	03	XOFF	03	

(2). 2 3 .....8 9  
(TF=2) D2+



ASCII “=” 9 188.  
 5 5.88100=5.881000=..... -1885 .588100-  
 =.588100=-.....

(3). (TF=3) ASCII “=” 8 188.  
 5 5.88100=5.88100=..... -1885 .58810-  
 =.58810=-.....  
 (4). (TF=4) T800  
 (TF=5) T800  
 10 1 10 8 ;  
 18

2																	
StX	A	B	C	X	X	X	X	X	X	X	X	X	X	X	X	CR	CKS
1	2		3			4				5	6						

1. <StX> ASCII (02H)
2. A, B, C
3. , .6
4. 6
5. <CR> ASCII (ODH)
6. <CKS>

			A
			Bits 0, 1, 2
0	1		2
0	0		0
1	0		0
0	1		0
1	1		0
0	0		1
1	0		1
0	1		1
1	1		1
			X
			Bits 3, 4
3			4
1			0
0			1
1			1
			X1
			X2
			X5
Bit 5			⌊
			Bits



Bit 3	= 1
Bit 4	(X10) = 1
Bit 5	1
Bit 6	0



地址：宁波市江北投资创业园C区 长兴路199号

服务热线：400-887-4165

传真：0574-87562271

邮编：315033

网址：<http://www.kelichina.com>