




KM04A85

2015 3

- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

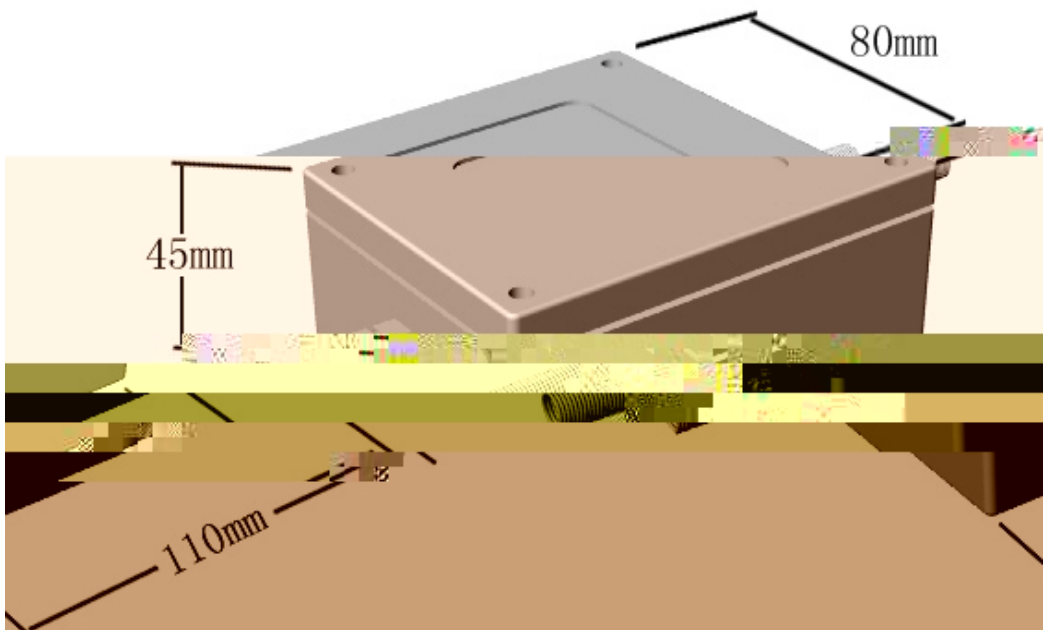



KM 模块KM04A8X设置工具

参数设置 标定 DA输出 帮助

分度值: 1

小数点: 0

零点跟踪范围: 0.0e

零点跟踪速度: 0.1s

手动置零范围: 0%F.S.

开机零点范围: 0%F.S.

滤波参数: 70 % (5~95)

AD位数: 18 位 (8~24)

读取参数 写入参数

串口号: COM1

波特率: 9600

恢复缺省值


当前重量: 0

当前AD: 0

读取 停止刷新

进入柯力公司网站

 柯力 版权所有(C) 2013

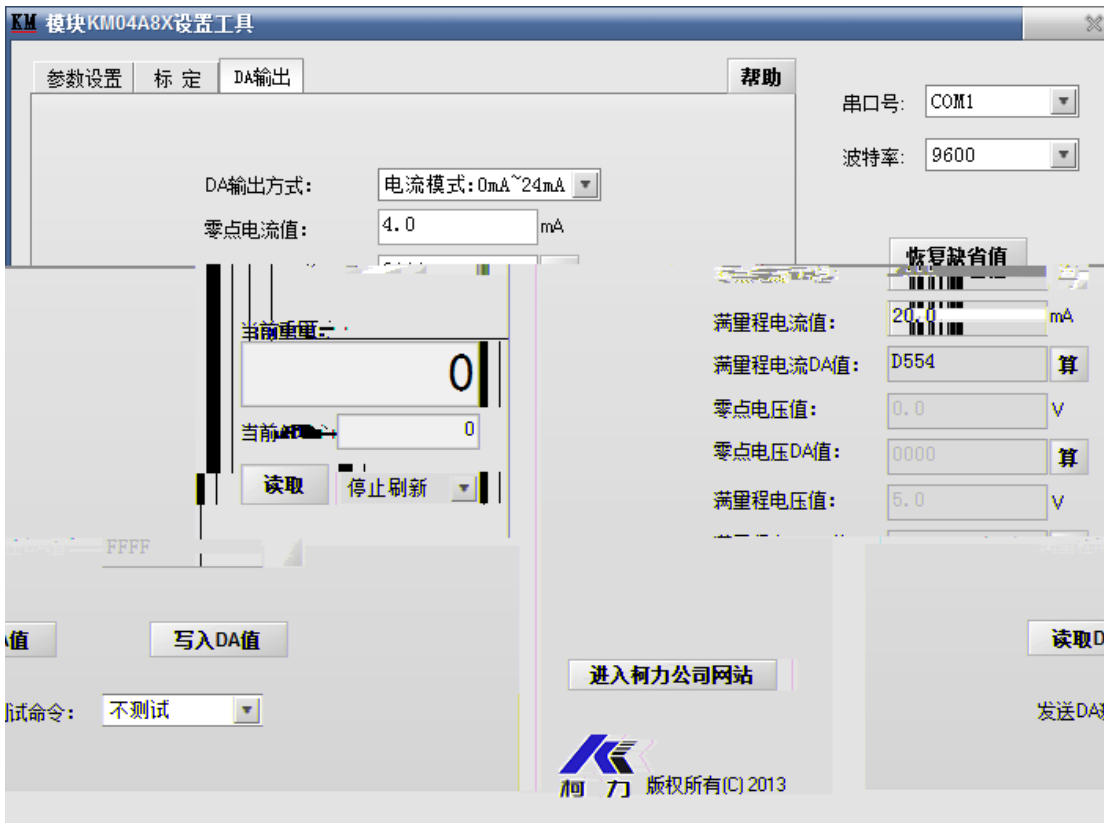

KM 模块KM04A8X设置工具.exe





C 199

400-887-4165

800-857-4165

0574-87562271

315033

<http://www.kelichina.com>