



XK3118T1-F (WX)

无线电子称重仪表

使用说明书

2017年9月版



00000577



1.0 概述

XK3118T1-
F(WX)




- ◆ : 内置6V/4Ah免维护铅酸蓄电池。
- ◆ 10 85 RH ~
- ◆ 10 95 RH ~
- ◆ 2kg


2.0 安装

2.1



XK3118T1-F(WX)

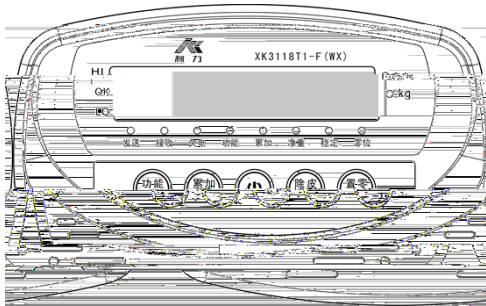

XK3118T1-F(WX)

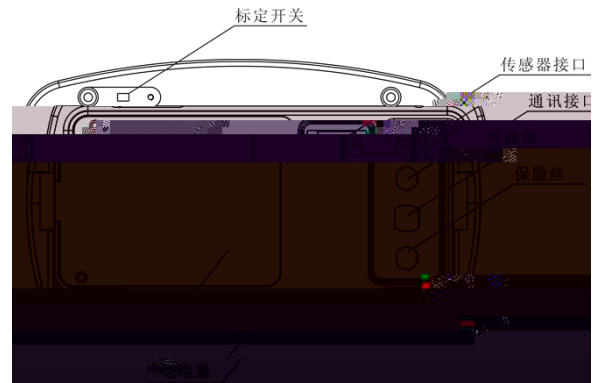

2.2

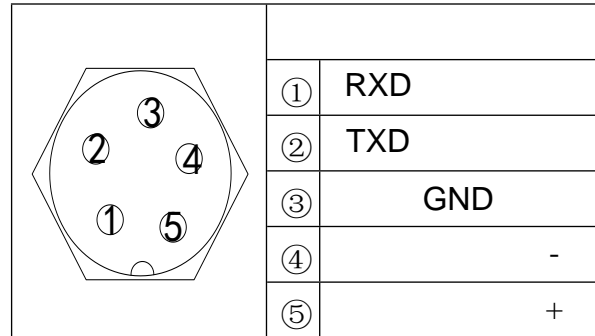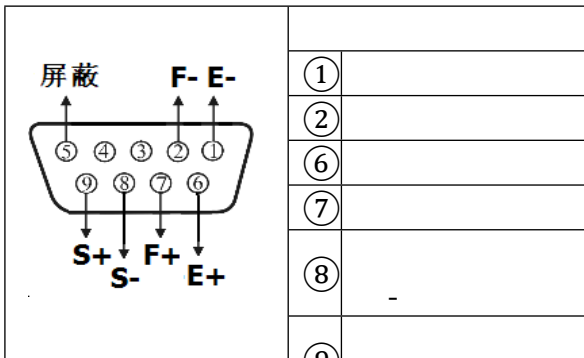

3.0 操作说明

3.1



	1	2	3
	3.6	6	3.
	3.5	5	3.



	3.4		

3.2

“ ”

”

“--

3.3

“ ” “ ”

3.4

“ ”

“0”

“0” “ ”

“ ” “ ”

“ ”

3.5

1

5

“ ”

“ ”

*** 3

3

n

2

“ ”

“ ” “ ”

“

←”

“←”

3


“ ”

“ ”

CLEAR-

“←”

“ ”

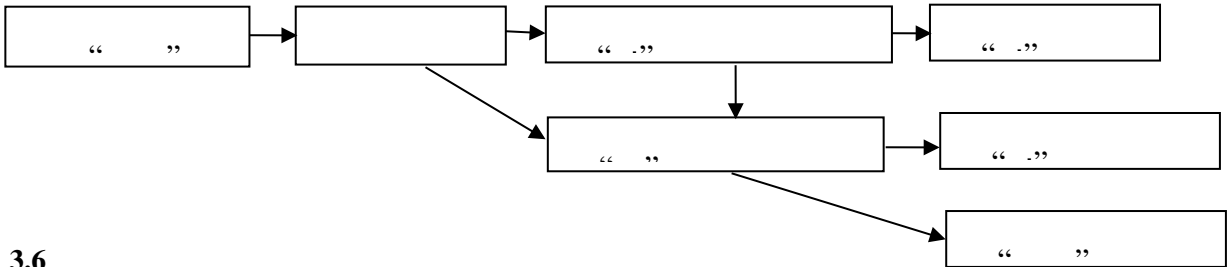

3.6

“ ”

1	“ ” “ ” “←”	Fn **	“ ” (Funtion) ANL Cot --
2	“ ” “←”	PS **	(Power Save) oFF oN 3 onP 2
3	“ ” “←”	br****	(Baud rate) 600 9600bps
4	“ ” “←”	Co *	(Communicate Mode) 1 6



5		H*****	(High) : “ ” “ ” “ ←”	2000
6		L*****	(Low) : “ ” “ ” “ ←” “HI” “LO” “OK”	1000
7		r*****		
8		t **		
9		CH **	0 15 16 ,	

“ ”

“ ”

ON

r

tQFM!"P



1 CP CP
 2 CH CP 0 15 16 CP 1 CP
 3 ERR 18
 4 3.6V

Lo2BAAt

3.7
 6V/4Ah
 30 “ ” 1/3
 24
 2 24
 3.8
 Lo1BAAt 5.5V “ ” 5.3V

如果仪表每隔一分钟显示【Lo2BAAt】，那表示无线发射器电池电压低于3.4V，提示用户尽快充电，当电压继续下跌无线发射器会停止工作。

4.0 错误信息提示

Err 01	
Err 02	
Err 03	
Err 04	
Err 05	AD
Err 06	
Err 07	9E
Err 09	
Err 10	
Err 18	
Err 20	




1		XK3118T1-F WX	1	
2		XK3118T1-F WX	1	
3		XK3118T1-F WX	1	
4		XK3118T1	1	
5		D 9 ()	1	
6	D	DB-9	1	
7		HKCT-10(M12×0.75)(5)	1	
8		XK3118T1 ()	1	
9	1	M4×12	4	
10	2	M6×25	1	
11	1	M4	4	
12	2	M6	1	
13		110~220VAC 10.5VDC	1	XK3118T1- F3(WX)



C 199

400-887-4165
0574-87562271
315033
<http://www.kelichina.com>

1		A5	A4
	2	70g	200g
	3		
	4		
	5	70g	80g
	6		
	7		