

Å
Å
Å
Å

Å
Å
Å
Å
Å

()

2

20

,

()

C 199

400-887-4165
 0574-87562271
 315033
<http://www.kelichina.com>

1.0 概述

XK3118T2
 A/D
 XK3118T2

ÔÉ

1
 2 50
 3
 4
 5
 6


- ◆ A/D 0 Ø 24bits
- ◆ 2uV/e
- ◆ DC 5V 1-6 ĐÉÁS
- ◆ : 0mV 20mV
- ◆ 6 ŠĐÁ
- ◆ 1/2/5/10/20/50 AC110 240V 50Hz 60Hz
- ◆ 6V/4AH
- ◆ 0°C~40°C :
- ◆ ŠÈÈ RH 10°C~50°C :
- ◆ ŠÁÁ RH

2.0 安装


2.1


XK3118T2

XK3118T2

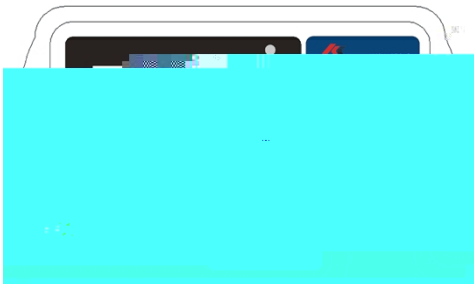

2.2



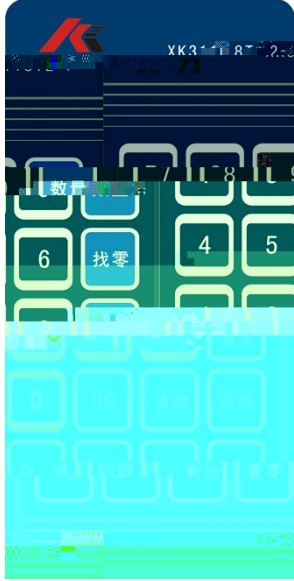

00	0

3.2

“0” “ ”

P4 p-

on

“off”

3.3

“ ” , ;

3.4

“ ” “0”

“0” “ ” “ ” “ ” “ ”

3.5

, , , (“00” 0), ,

50

00”

“ ” “00” “store plu 00 49 “ ”

00”

“ ” “recall plu “ ”

3.6

20d

“ ” “acc”

2s

20d “ ” “acc” “ ”



3.7

0 “ ”
“ ”

3.8“ ”

0 “ ” “ ”
“ ”

3.9

“ ”
“ ”

3.10

“U1.0” “ ”

1	“ ” “ ” “ ”	F1 unit	kg 500g “ ” kg 500g “ ” “ ”
2	“ ” “ ” “ ”	F2 ADC	ADC “ ” “ ”
3	“ ” “ ” “ ”	F3 bk	bk auto off on off auto on 20d “ ” on “ ”
4	“ ” “ ” “ ”	F4 pass	“ ” P1 “ ” p2 done F4 .
5	“ ” “ ” “ ”	F5 clock	“ ” “ ” “00 00 00”
6	“ ” “ ” “ ”	F6 date	“ ” “ ” “yymmdd” “ ” “mmddy” “ ” “ddmmy” “ ” “00 00 00” “ ”
7	“ ” “ ” “ ”	F7 SPS	p2 P1 “ ” done F7 “ ”
8	“ ” “ ” “ ”	F8 Pro	XK3118T2



3.11

(;*• oi

6V4AH

45

90

“ ”

24

2

24

4.0 维护保养及注意事项

4.1.

4.2.

4.3.



4.4.

()



Err 4	
Err 5	ADC
Err 6	

1		XK3118T2	1	
2		XK3118T2	1	
3		XK3118T2	1	



4		XK3118T2	1	
5		D 9	1	
6		D 9	1	
7	D	DB-9	2	
8		XK3118T2	1	
9		M6x25	1	
10		M6	1	
11		110-220VAC 10.5VDC	1	