

# **XK3118T5**

数字显示仪表

使用说明书

2017年9月版

•

•



邮 编： 315033

网 址： <http://www.kelichina.com>

1

: DC 3.3V 1 6 350Ω


30

AC 110~220V

0°C 40°C  
10°C 60°C


85 RH  
95 RH

2.1

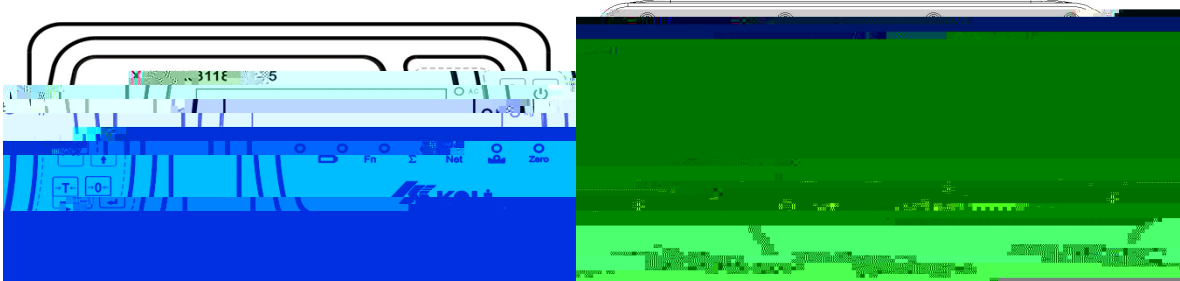

XK3118T5

2.2

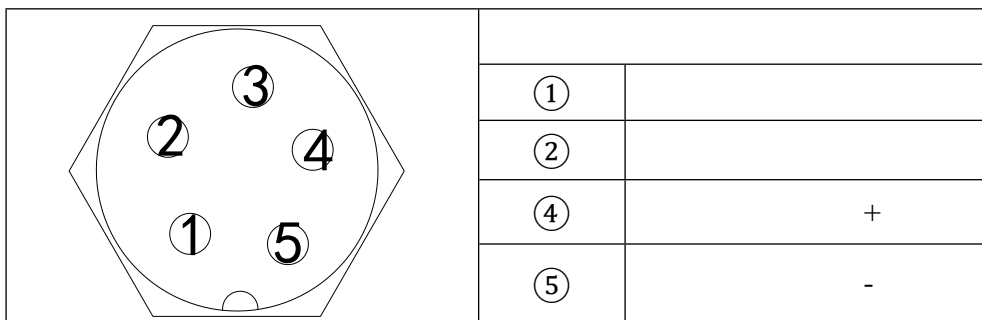

!

!

3.1



	1	2	2
	3.7	7	3.
	3.5	5	3.
	3.4		

3.2

“Zero”

“\_”

”

5

3.3

“→0←”

“ ”

3.4

“T”  
“0”

“0”

“T”

“ ”

“NET”

“ ”

“ ”

3.5

1

5

“Σ”

“Fn”

3

n

\*\*\*

3

2

“Σ”

“Fn”

“←”

“←”

3

“#”

“←”

“Fn”

3.6

“Fn”

“Fn”

“kg”

“#”

“ ”

“←”

“Fn”

3.7

“Fn”

--	--	--	--




3.8

4 AA

3.9



Lo

BAt

<b>Err 01</b>	
<b>Err 02</b>	
<b>Err 03</b>	
<b>Err 04</b>	
<b>Err 05</b>	AD
<b>Err 06</b>	
<b>Err 09</b>	

1		XK3118T5	1	
2		XK3118T5	1	
3		XK3118T5	1	
4		XK3118T5	1	
5		HKCT-01 M12×1 5	1	
6		XK3118T5	1	
7	1	M4×8	4	
8	2	M6×25	1	
9	1	M4	4	
10	2	M6	1	
11		110-220VAC	1	

		7.5VDC		