
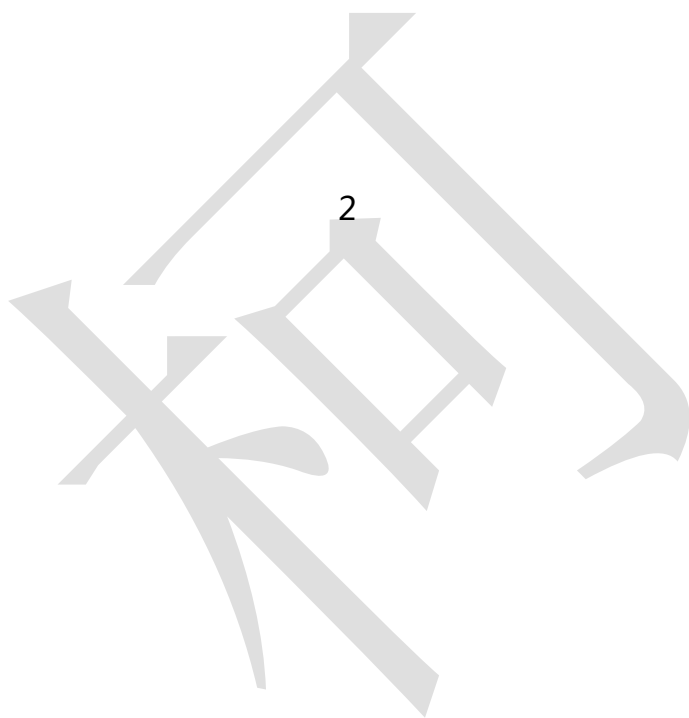


柯力

( )

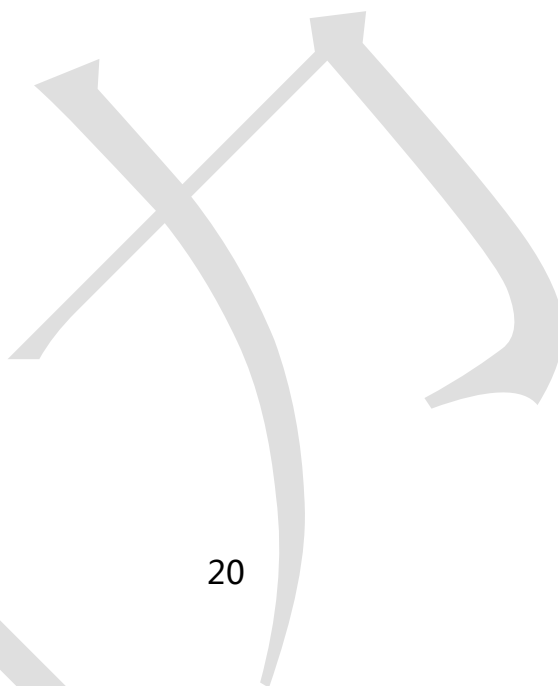

( )

<http://www.kelichina.com>

1.0

XK3118T16+

◆ A/D  
◆  
◆  
◆  
◆  
◆  
◆  
◆  
◆

◆  
◆  
◆  
◆  
◆  
◆

2.0

1.5uV/e  
DC 5V, 1 6  
-16mV 18mV  
4  
1/2/5/10/20/50  
6 LED 12  
/RS232

RS232  
1200/2400/4800/9600  
AC 110 220V 50Hz 60Hz  
6V/4Ah  
0°C~40°C 10 85 RH  
10°C~40°C 10 95 RH  
1.5kg  
236\*150\*150mm

\* \*

- A/D

RS232

20bitAD


10

3


600bps

1

### XK3118T16+

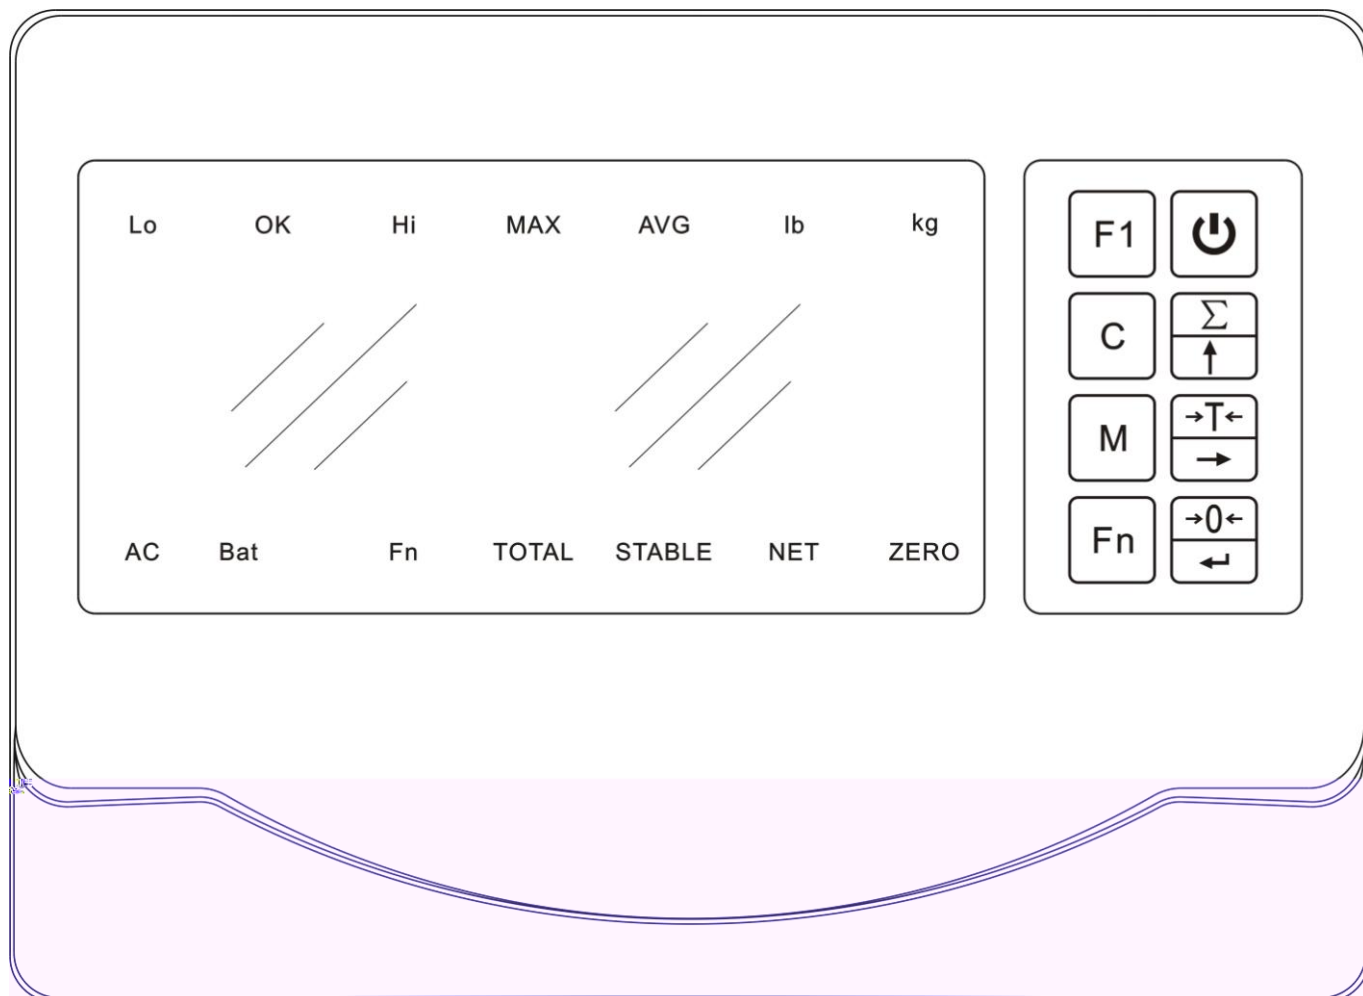

XK3118T16+

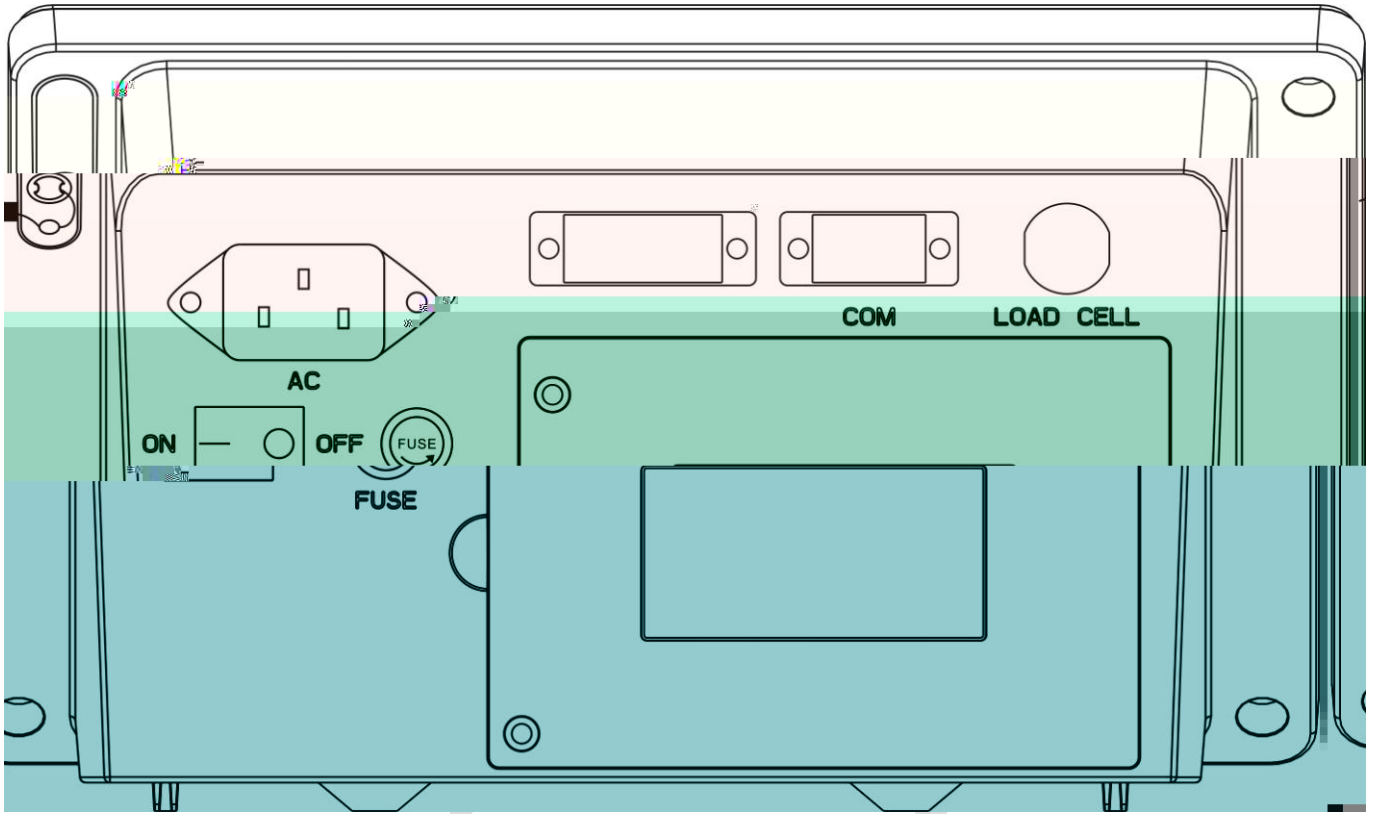

2.2

5			DB9	RS232	
				TXD	
				RX D	
				GND	
				RS232	
				S+	
S-					
E+					
E-					



M	M		
→T← →		3.4	
Fn		, 3.6	3.6
→0← ←		3.3	



3.2

3.3


3.4

3.5

1

2

3

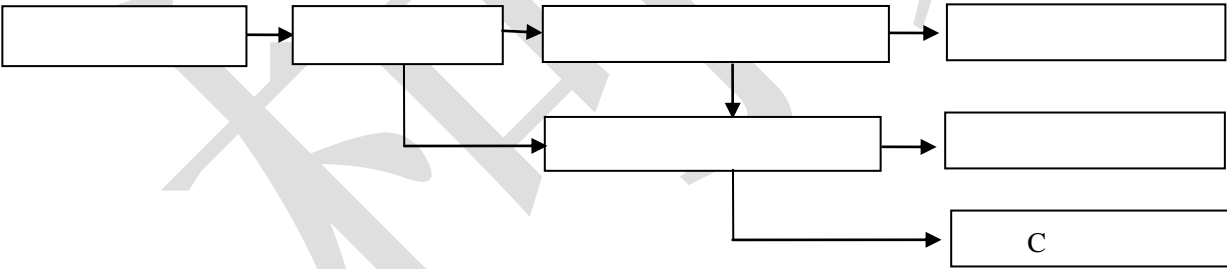


kg lb

3.6

1		Fn **	Lb Fn (Funtion)
2		PS **	oFF oN onP (Power Save) 3 2



3		br****	(Baud rate) 1200 9600bps
4		Co *	(Communicate Mode) 1 7
5		H*****	(High): 2000
6		L*****	(Low): 1000 HI LO , , OK 1 2
7		dIS***	0 7
8		R*****	

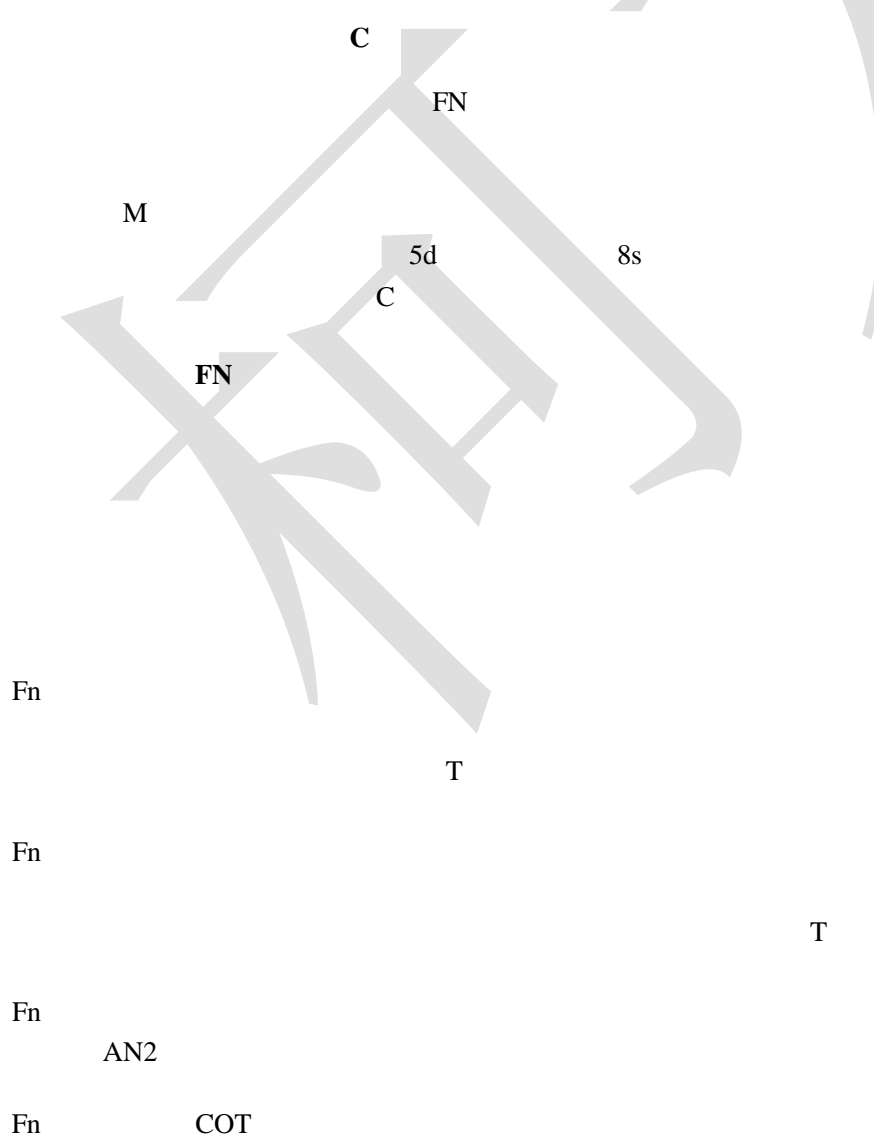

30




LO

OK

HI

3.7

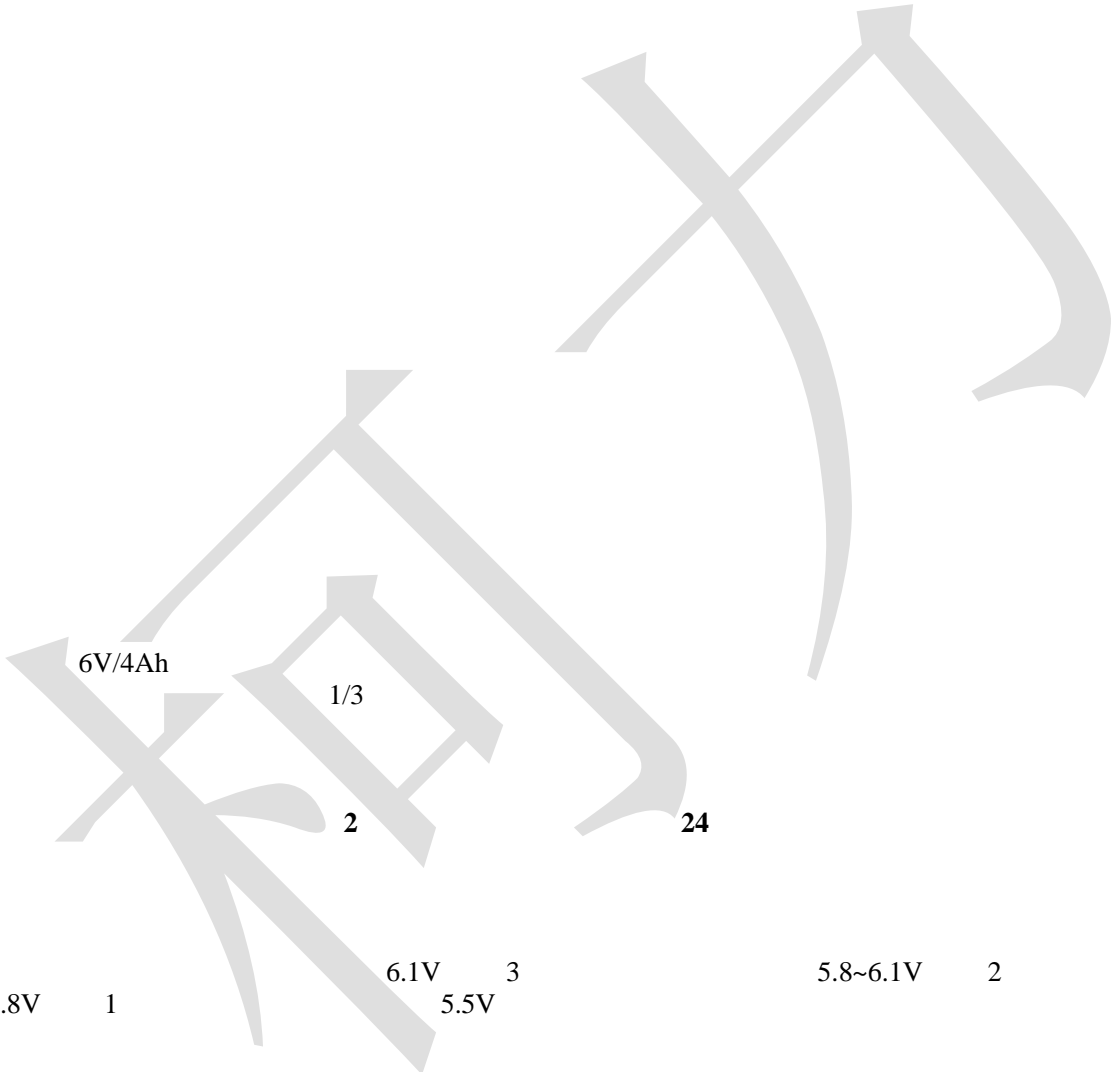

30

3.8

5.5~5.8V

1

6.1V

3

5.5V

5.8~6.1V

2

4.0

<b>Err 01</b>	
<b>Err 02</b>	
<b>Err 03</b>	
<b>Err 04</b>	

1		XK3118T16+	1	
2		XK3118T16+ ( )	1	
3		XK3118T16+ ( )	1	
4		XK3118T16+	1	
5		5 16M	1	
6		XK3118T16+	1	
7	1	M4 8	4	
8	2	M6 25	1	
9		M6	1	
10		0.5A, 5mm 20mm	1	
11		3*0.75/1.5m	1	