



KL2000D

饲料搅拌称重控制仪表

说明书

2011年02月版

目 录

1.	1
2.	2
2.1	2
2.2	2
2.3	3
2.4	3
2.5	3
3.	3
3.1	3
3.2	().....	4
3.3	4
3.4	4
3.5	4
3.6	4
3.7	4
3.8	4
3.9	5
3.10	5
3.11	6
3.12	6
3.13	6
4.	7
1	7
2	7
3	8


1. 技术参数


- ❖ A/D 24bit
- ❖ 1.5uV/e
- ❖ DC+ 5V, 1 6 350
- ❖ 6
- ❖ 1/2/5/10/
- ❖ 5 LED 2 LED 2 LED
- ❖ 3 1
- ❖ 600bps
- ❖
- RS232C
- 1200/2400/4800/9600
- RS232 30
- ❖ AC110~220V 50~60Hz / DC 24V 32V 18V
- ❖
- 20
- 100
- 146
- ❖
- 0°C 40°C
- 85 RH
- ❖
- 20°C 60°C
- 85 RH
- ❖



2. 安装

2.1

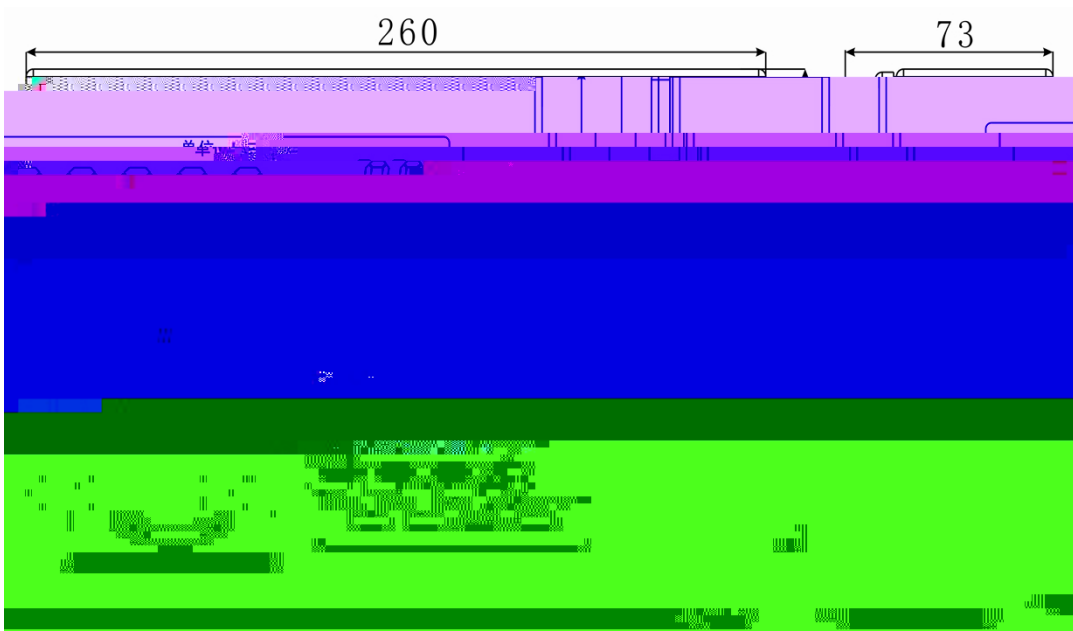

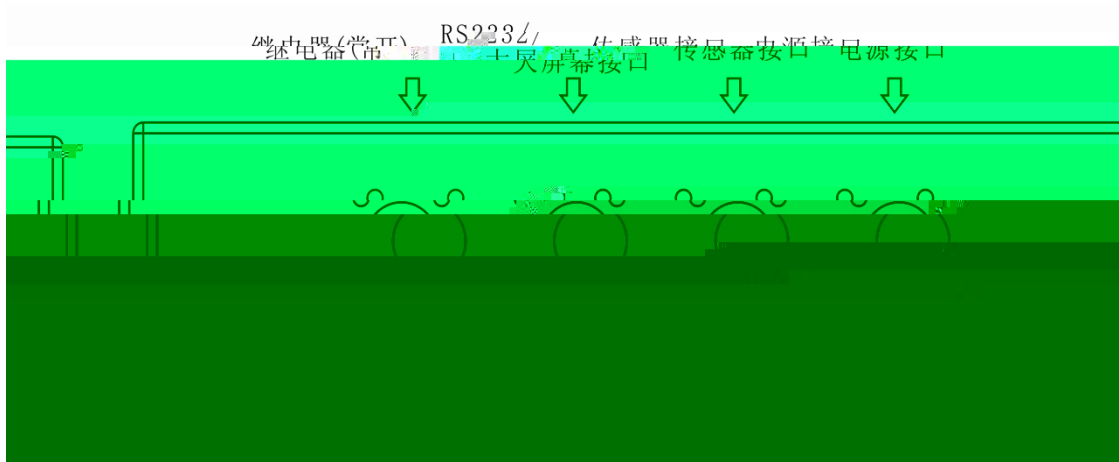

2.2

2.3


	1		+E	
	2		-E	
	3		+S	
	4		-S	
	5		+F	
	6		-F	
	7			

!


传感器的屏蔽线必须可靠接地。

!

2.4

			
	1		
	2		

2.5

				
	1		+OUT	
	2		-OUT	
	3			
	4			
5		GND		

RS232

3. 操作说明

3.1

3.2 ()

3.3

3.4

3.5

3.6

1		[]	
2		[]	
2		[]	
3		[]	
4		[]	
5		[]	
6		[]	
7		[]	
8		[]	

3.7

1	[]
2	[]
3	[CAL]
4	[]
5	[]
6	[]
7	[]
8	[]

3		[加]	
4		[]	
		[]	
5		[]	

3.9

1 []


2 []

3

4

5

6 []

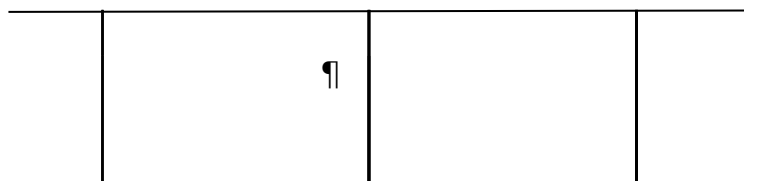

¶

8		[]	

	1 7	1 7	略
8		[]	
9		[]	

3.10

1		[]	
2		[]	
3		[]	
3		[]	
5		[]	
6		[]	
7		[]	
		[]	

3.11

1		[]	
2		[]	
3		[]	
4		[]	

3.12

1		[]	
2		[]	
3		[]	
4		[]	

3.13

1		[]	
2		[]	
3		[d]	

附录2: 串行通讯数据格式

ASCII

10

1

10

8

—

1

	02(XON)	REA D		03(XOFF)
	开始		:0211	

2

	02(XON)	READ	A	03(XOFF)
	开始			

